

SIB8108

(Bio-Crypto Controller)

OVERVIEW

The SIB8108 a Single chip of Bio-Crypto device offers an highly secure access control system. It integrates a 32-bit microprocessor with two 8k byte cache, one 512k byte flash memory, large system SRAM and powerful I/O to provide a high performance biometric security system which built in proven finger print extraction algorithm (winner of International Fingerprint Verification Competition 2000) and Public Key Infrastructure (PKI) function.

APPLICATIONS

- ❖ General locking device
- ❖ Desktop computer access
- ❖ Private/secret key deployment
- ❖ Access control and monitoring
- ❖ Phone, keyboard, door, safe access
- ❖ Toy, electronic pets.
- ❖ Replace keypad for entering the Password.
- ❖ Ownership is transferable if granted by current owner.
- ❖ No reading of the confidential area in flash memory is allowed.
- ❖ RSA key pair are generated internally, only public key is allowed to be read externally, private key is always resided in the silicon
- ❖ Provide maximum security as the biometric matching is performed in the silicon
- ❖ Provide a set of protocol through UART for external MCU to control the crypto function, biometric verification and I/O logic function.
- ❖ Support most of the fingerprint sensor in the market, like STMicro, Fujitsu and sweep sensor, etc. Allow plug in for new sensor type.
- ❖ power management for maximizing battery life for mobile devices

TECHNICAL FEATURES


- ❖ Powerful I/O interface : UARTs, I2C (Master/ Slave), SPI, Wireless interface and 32 General Purpose I/O control.
- ❖ Enrolment/ De-enrolment and Authentication can be performed through UART or wireless interface
- ❖ Once owner is enrolled, other users of the same device can only be enrolled with owner's approval.
- ❖ Provide more than 512K byte of flash memory.
- ❖ Built-in AES algorithm for data encryption.

FUNCTIONS

The three basic functions:

- ❖ **Basic Stand Alone:** Capable to enroll (Read an finger print image from sensor), De-Enroll (Search and remove the related finger print data) and authenticate (Read the finger print image and match with the stored template)
- ❖ **Internal MCU Emulation:** Allow to utilize the internal MCU emulation to interface with the external devices.
- ❖ **External MCU:** capable to interface with external MCU to communicate the finger print authentication result.

BLOCK DIAGRAM

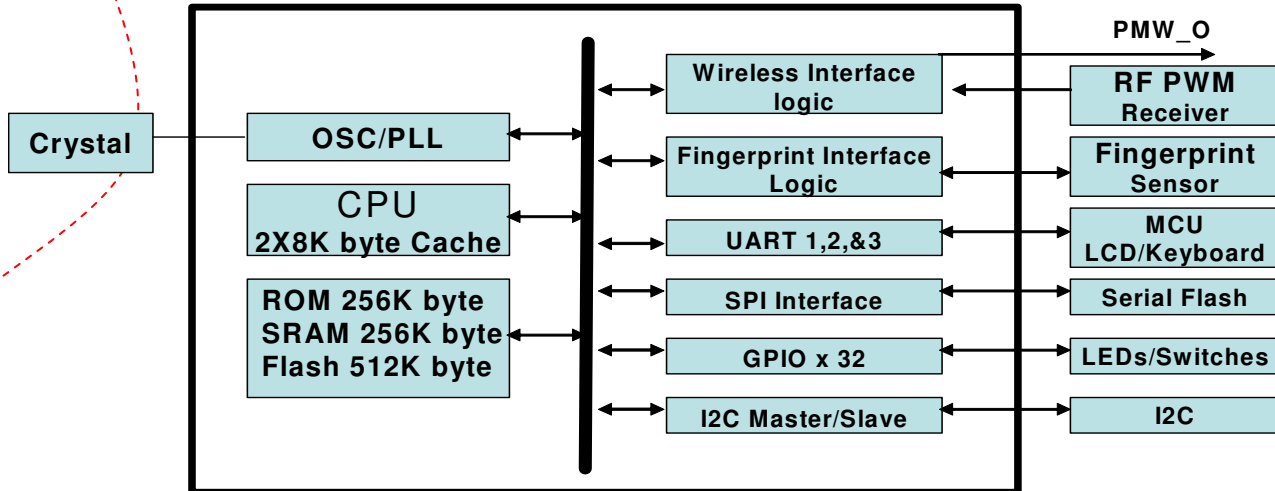

FINGER PRINT VERIFICATION SPECIFICATION

Finger print template size	360 byte / fingerprint template
Maximum finger print templates	250
False Acceptance rate (FAR)	< 1 in 10000
False Rejection rate (FRR)	< 1 in 1000
Verification time (100 templates)	< 1 sec

DC PARAMETERS

Parameter	Ratings	Unit
Operating Temperature Range (T_{opr})	0 to +70	$^{\circ}C$
Storage Temperature Range	-55 to +125	$^{\circ}C$
Lead Temperature Range (soldering, 10 seconds)	+260	$^{\circ}C$
Maximum Supply Voltage, V_{IO}	+3.6	V
Maximum Input Voltage, V_{INT}	+2.75	V

Note: The absolute maximum ratings are rated values, which must not be exceeded during operations, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

TRILOBYTE TECH PTE LTD

#41 Kallang Pudding Road #02-03 Golden Wheel Building
 Singapore 349316 Tel:(65) 6744 9789 Fax: (65) 6741 3543
 For sales information, please e-mail: sales@trilobytetech.com
 Information provided here is subject to change without notice. All rights reserved